

DATA SHEET

SKY65370-11: 814 to 849 MHz High Linearity, Active Bias Low-Noise Variable Gain Amplifier

Applications

- LTE, WCDMA, GSM wireless infrastructure
- Low-noise, high-linearity systems
- Macro-base stations
- Small cells

Features

- Fully integrated low-noise front end
- High gain: 38 dB
- Excellent return loss: >20 dB
- High linearity gain control > 35 dB
- Low NF: 0.82 dB
- Switchable high/low gain state modes
- Temperature and process stable active bias
- Small MCM (16-pin, 8 x 8 mm) package (MSL3 @ 260 °C per JEDEC J-STD-020)

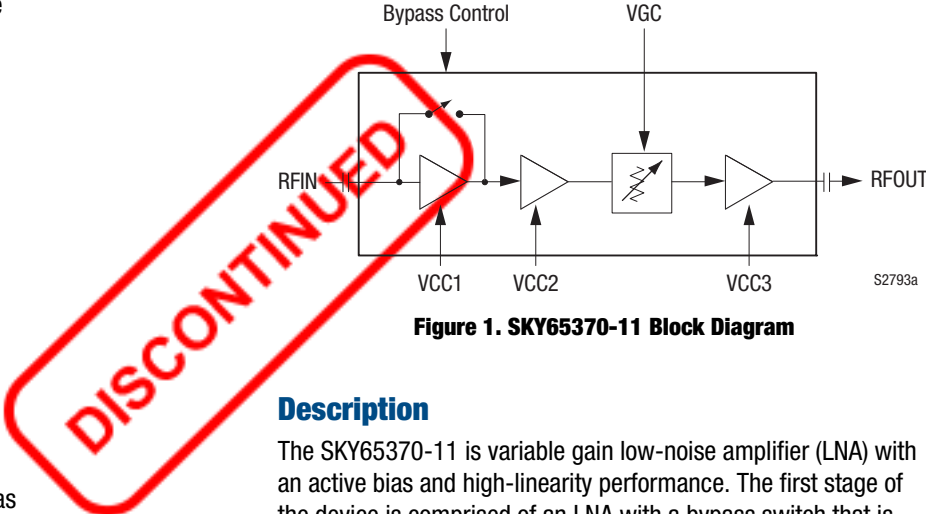


Figure 1. SKY65370-11 Block Diagram

Description

The SKY65370-11 is variable gain low-noise amplifier (LNA) with an active bias and high-linearity performance. The first stage of the device is comprised of an LNA with a bypass switch that is followed by a high-linearity driver amplifier, a variable voltage attenuator, and a high-linearity power amplifier. This module architecture provides excellent return loss, low noise, and high-linearity performance.

The internal active bias circuitry ensures repeatable performance over temperature. The device is fully integrated and requires minimal external components.

The SKY65370-11 is manufactured in a compact, 8 x 8 mm, 16-pin Multi-Chip Module (MCM) package. A functional block diagram is shown in Figure 1. The pin configuration and package are shown in Figure 2. Signal pin assignments and functional pin descriptions are provided in Table 1.

The SKY65370-11 is part of a family of LNAs that cover the frequency range of 699 MHz to 2570 MHz:

Part Number	Frequency
SKY65369-11	832 to 862 MHz
SKY65370-11	814 to 849 MHz
SKY65371-11	880 to 915 MHz
SKY65372-11	699 to 798 MHz
SKY65373-11	1710 to 1785 MHz
SKY65374-11	1850 to 1915 MHz
SKY65375-11	1920 to 1980 MHz
SKY65376-11	2500 to 2570 MHz



Skyworks Green™ products are compliant with all applicable legislation and are halogen-free. For additional information, refer to *Skyworks Definition of Green™*, document number SQ04-0074.


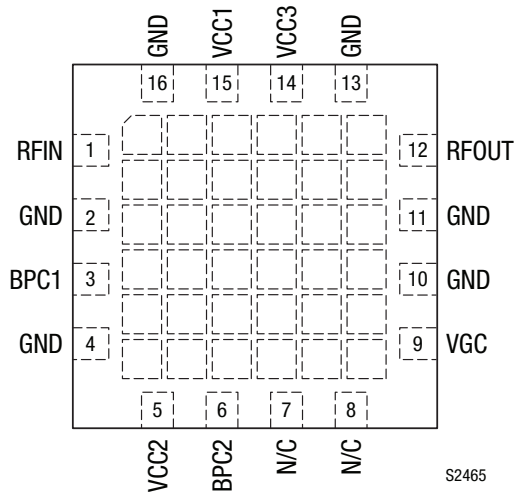


Figure 2. SKY65370-11 Pinout (Top View)

Table 1. SKY65370-11 Signal Descriptions

Pin	Name	Description	Pin	Name	Description
1	RFIN	RF input	9	VGC	Gain control, 0 V (maximum gain) to +3.3 V (minimum gain)
2	GND	Ground	10	GND	Ground
3	BPC1	Bypass switch for high/low gain state, terminal 1. See Table 8.	11	GND	Ground
4	GND	Ground	12	RFOUT	RF output
5	VCC2	Second state amplifier bias. Connect to +5 V, 120 mA minimum DC supply.	13	GND	Ground
6	BPC2	Bypass switch for high/low gain state, terminal 2. See Table 8.	14	VCC3	Third stage amplifier bias. Connect to +5 V, 120 mA minimum DC supply.
7	N/C	No connection. Can be left open or grounded.	15	VCC1	First stage amplifier bias. Connect to +5 V, 120 mA minimum DC supply.
8	N/C	No connection. Can be left open or grounded.	16	GND	Ground

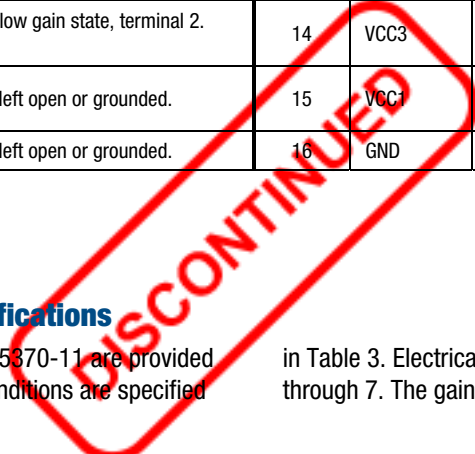

Electrical and Mechanical Specifications

The absolute maximum ratings of the SKY65370-11 are provided in Table 2. The recommended operating conditions are specified

in Table 3. Electrical specifications are provided in Tables 4 through 7. The gain control logic is shown in Table 8.

Table 2. SKY65370-11 Absolute Maximum Ratings¹

Parameter	Symbol	Minimum	Maximum	Units
Supply voltage	V _{CC}		5.5	V
RF input power	P _{IN}		+15	dBm
Storage temperature	T _{STG}	-55	+150	°C
Operating temperature	T _C	-40	+100	°C
Junction temperature	T _J		+150	°C

¹ Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

ESD HANDLING: *Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD when handling or transporting. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD handling precautions should be used at all times.*

Table 3. SKY65370-11 Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Units
RF input power	P _{IN}		-25		dBm
Frequency range	f	814		849	MHz
Supply voltage	V _{CC}	4.75	5.00	5.25	V
Gain control voltage	V _{GC}	0		+3.3	V
Bypass control voltage: Logic high Logic low	V _{BPC1} , V _{BPC2}	2.7 0	3.0	3.3 0.6	V V
Operating case temperature	T _C	-40		+85	°C

Table 4. SKY65370-11 Electrical Specifications¹ (1 of 2)

(V_{DD} = 5.0 V @ Maximum Gain [V_{GC} = V_{BPC1} = 0 V, V_{BPC2} = 3.3 V], T_C = +25 °C, P_{IN} = -25 dBm, f = 830 MHz,
Characteristic Impedance [Z₀] = 50 Ω, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
RF Specifications						
Frequency range	f		814		849	MHz
Quiescent current	I _{CQ}			350	450	mA
Noise figure ²	NF	Gain = +35 dB		0.82	1.00	dB
Small signal gain	IS211	P _{IN} = -25 dBm	37.5	39.0		dB
Gain variation over frequency		P _{IN} = -25 dBm: Gain = 35 and 18 dB (high gain mode) Gain = 17 and 3 dB (low gain mode)		0.80	0.95	dB
Part-to-part gain variation		Gain (dB) = 32, 29, 26, 22, 13, 10, 6	-1		+1	dB
Gain control range (absolute gain)		P _{IN} = -25 dBm: High gain mode, BPC1 = 0, BPC2 = 1, V _{GC} = 0 V	37.5	40.5	43.0	dB
		High gain mode, BPC1 = 0, BPC2 = 1, V _{GC} = 3.3 V	12.0	15.0	17.0	dB
		Low gain mode, BPC1 = 1, BPC2 = 0, V _{GC} = 0 V	18.5	20.0	23.0	dB
		Low gain mode, BPC1 = 1, BPC2 = 0, V _{GC} = 3.3 V	-10.0	-5.0	+1.0	dB
Input return loss	IS111	P _{IN} = -25 dBm: Gain = 3 and 17 dB (low gain mode)	18.5	21		dB
		Gain = 18 dB (high gain mode)	18.5	23		dB
		Gain = 35 dB (high gain mode)	20.5	23		dB
Output return loss	IS221	P _{IN} = -25 dBm: Gain = 3 dB and 17 dB (low gain mode)	16	18		dB
		Gain = 18 dB and 35 dB (high gain mode)	16	18		dB
Reverse isolation	IS121	P _{IN} = -25 dBm, gain = 35 dB (High gain)	61	64		dB

Table 4. SKY65370-11 Electrical Specifications¹ (2 of 2)

(V_{DD} = 5.0 V @ Maximum Gain [V_{GC} = V_{BPC1} = 0 V, V_{BPC2} = 3.3 V], T_c = +25 °C, P_{IN} = -25 dBm, f = 830 MHz, Characteristic Impedance [Z₀] = 50 Ω, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
<i>RF Specifications (continued)</i>						
Third order input intercept point ³	IIP3	Δf = 1 MHz, P _{IN} = -25 dBm/tone:				
		Gain = 11dB	+19	+22		dBm
		Gain = 17dB	+15	+19		dBm
		Gain = 29dB	+4	+6		dBm
1 dB input compression point ⁴	IP1dB	Gain = 11dB	+9.5	+15.0		dBm
		Gain = 17dB	+5.0	+10.0		dBm
		Gain = 28dB	-6.0	-4.0		dBm
		Gain = 35dB	-13.0	-8.5		dBm

¹ Performance is guaranteed only under the conditions listed in this table.

² Loss from the input SMA connector and Evaluation Board up to pin 1 has been de-embedded from the NF measurement. See Table 5 for full specification.

³ See Table 6 for full specification.

⁴ See Table 7 for full specification.

Table 5. SKY65370-11 Electrical Specifications: Noise Figure¹

(V_{DD} = 4.75 to 5.25 V, f = 814 to 849 MHz, T_c = -40 °C to +85 °C, P_{IN} = -25 dBm, Characteristic Impedance [Z₀] = 50 Ω, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Noise figure	NF	Gain = 3 to 6 dB			22.70	dB
		Gain = 7 to 8 dB			20.70	dB
		Gain = 9 to 10 dB			18.70	dB
		Gain = 11 to 12 dB			16.70	dB
		Gain = 13 to 14 dB			14.70	dB
		Gain = 15 to 16 dB			12.80	dB
		Gain = 17 to 18 dB			10.80	dB
		Gain = 19 to 20 dB			8.80	dB
		Gain = 21 to 22 dB			6.80	dB
		Gain = 23 to 24 dB			5.30	dB
		Gain = 25 to 26 dB			3.50	dB
		Gain = 27 to 28 dB			2.40	dB
		Gain = 29 to 30 dB			2.10	dB
		Gain = 31 to 32 dB			1.60	dB
Gain = 33 to 34 dB			1.35	dB		
Gain = 35 dB			1.15	dB		

¹ Verified by characterization.

Table 6. SKY65370-11 Electrical Specifications: IIP3¹

(V_{DD} = 4.75 to 5.25 V, f = 814 to 849 MHz, T_c = -40 °C to +85 °C, P_{IN} = -25 dBm, Characteristic Impedance [Z₀] = 50 Ω, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Third order input intercept point	IIP3	Gain = 3 to 11 dB	+18			dBm
		Gain = 12 to 17 dB	+14			dBm
		Gain = 18 to 29 dB	+3			dBm
		Gain = 30 to 35 dB	+1			dBm

¹ Verified by characterization.

Table 7. SKY65370-11 Electrical Specifications: IP1dB¹

(V_{DD} = 4.75 to 5.25 V, f = 814 to 849 MHz, T_c = -40 °C to +85 °C, P_{IN} = -25 dBm, Characteristic Impedance [Z₀] = 50 Ω, Unless Otherwise Noted)


Parameter	Symbol	Test Condition	Min	Typ	Max	Units
1 dB input compression point	IP1dB	Gain = 3 to 5 dB	+10.5			dBm
		Gain = 6 to 11 dB	+8.0			dBm
		Gain = 12 to 17 dB	+4.0			dBm
		Gain = 18 to 29 dB	-7.0			dBm
		Gain = 30 to 35 dB	-14.0			dBm

¹ Verified by characterization.

Table 8. Gain Control Logic¹

	BPC1 (Pin 3)	BPC2 (Pin 6)
High gain	0	1
Low gain	1	0

¹ "1" = 3.0 V, "0" = 0 V.

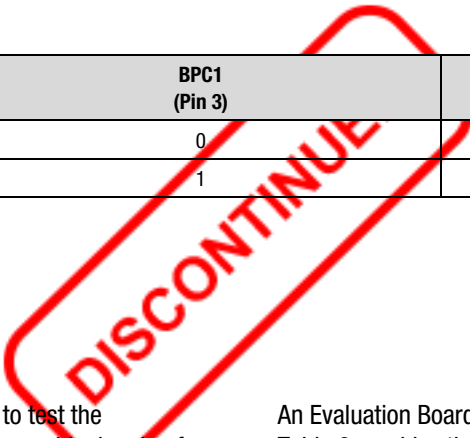

Evaluation Board Description

The SKY65370-11 Evaluation Board is used to test the performance of the SKY65370-11 LNA. An assembly drawing for the Evaluation Board is shown in Figure 3 and the layer detail is provided in Figure 4. The layer detail physical characteristics are noted in Figure 5.

An Evaluation Board schematic diagram is provided in Figure 6. Table 9 provides the Bill of Materials (BOM) list for Evaluation Board components.

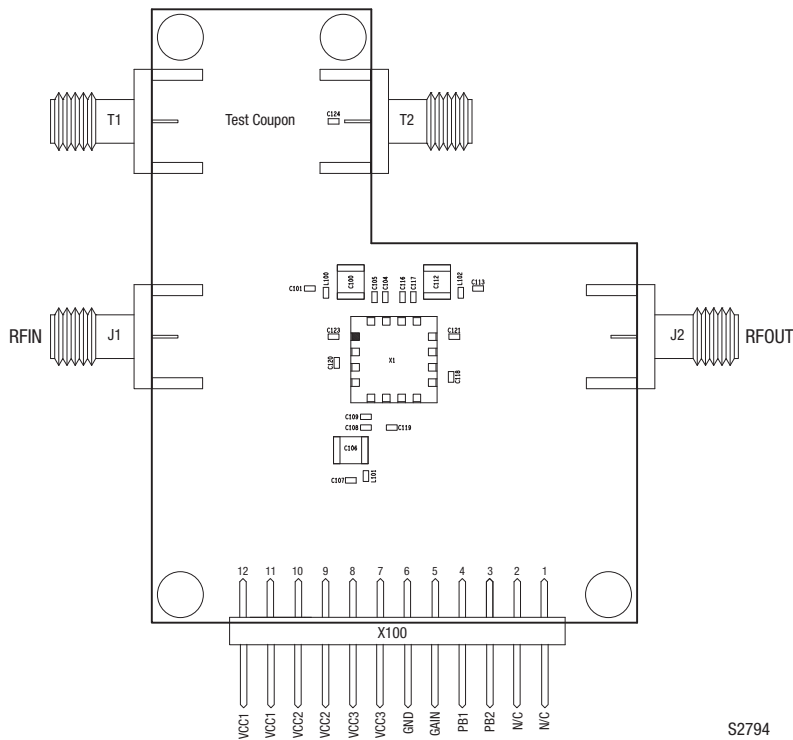


Figure 3. SKY65370-11 Evaluation Board Assembly Diagram




DISCONTINUED

Figure 4. SKY65370-11 Evaluation Board Layer Detail

Cross Section	Name	Thickness (mm)	Material
	Tmask	0.010	Solder Resist
	L1	0.035	—
	Dielectric	0.305	R04003C
	L2	0.018	—
	Dielectric	4 x 0.101	R04350B RF
	L3	0.018	—
	Dielectric	0.305	R04003C
	L4	0.035	—
	Bmask	0.010	Solder Resist

S3351

Figure 5. Layer Detail Physical Characteristics

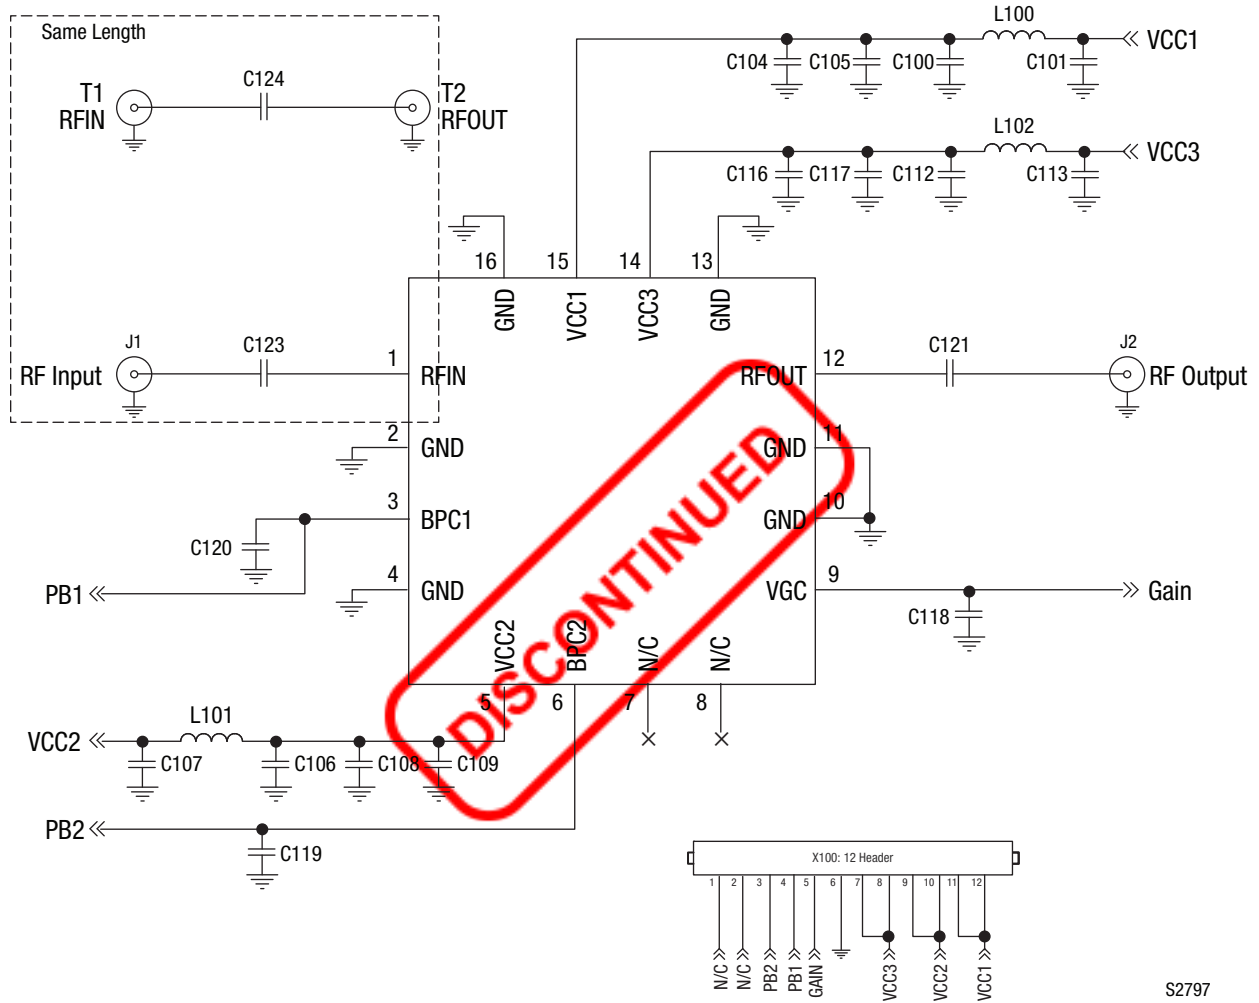

S2797

Figure 6. SKY65370-11 Evaluation Board Schematic

Table 9. SKY65370-11 Evaluation Board Bill of Materials

Component	Size	Value	Tolerance (%)
C100, C106, C112	1210	10 μ F	10
C101, C107, C113	0402	10 pF	5
C104, C109, C116, C124	0402	1000 pF	5
C121, C123	0402	150 pF	5
C105, C108, C117	0402	100 nF	10
C118, C119, C120	DNI	-	-
L100, L101, L102	0603	68 nH	2

Package Dimensions

The PCB layout footprint for the SKY65370-11 is provided in Figure 7. Package dimensions are shown in Figure 8, and tape and reel dimensions are provided in Figure 9.


Package and Handling Information

Since the device package is sensitive to moisture absorption, it is baked and vacuum packed before shipping. Instructions on the shipping container label regarding exposure to moisture after the container seal is broken must be followed. Otherwise, problems related to moisture absorption may occur when the part is subjected to high temperature during solder assembly.

The SKY65370-11 is rated to Moisture Sensitivity Level 3 (MSL3) at 260 °C. It can be used for lead or lead-free soldering. For additional information, refer to Skyworks Application Note, *PCB Design and SMT Assembly/Rework Guidelines for MCM-L Packages*, document number 101752.

Care must be taken when attaching this product, whether it is done manually or in a production solder reflow environment. Production quantities of this product are shipped in a standard tape and reel format.




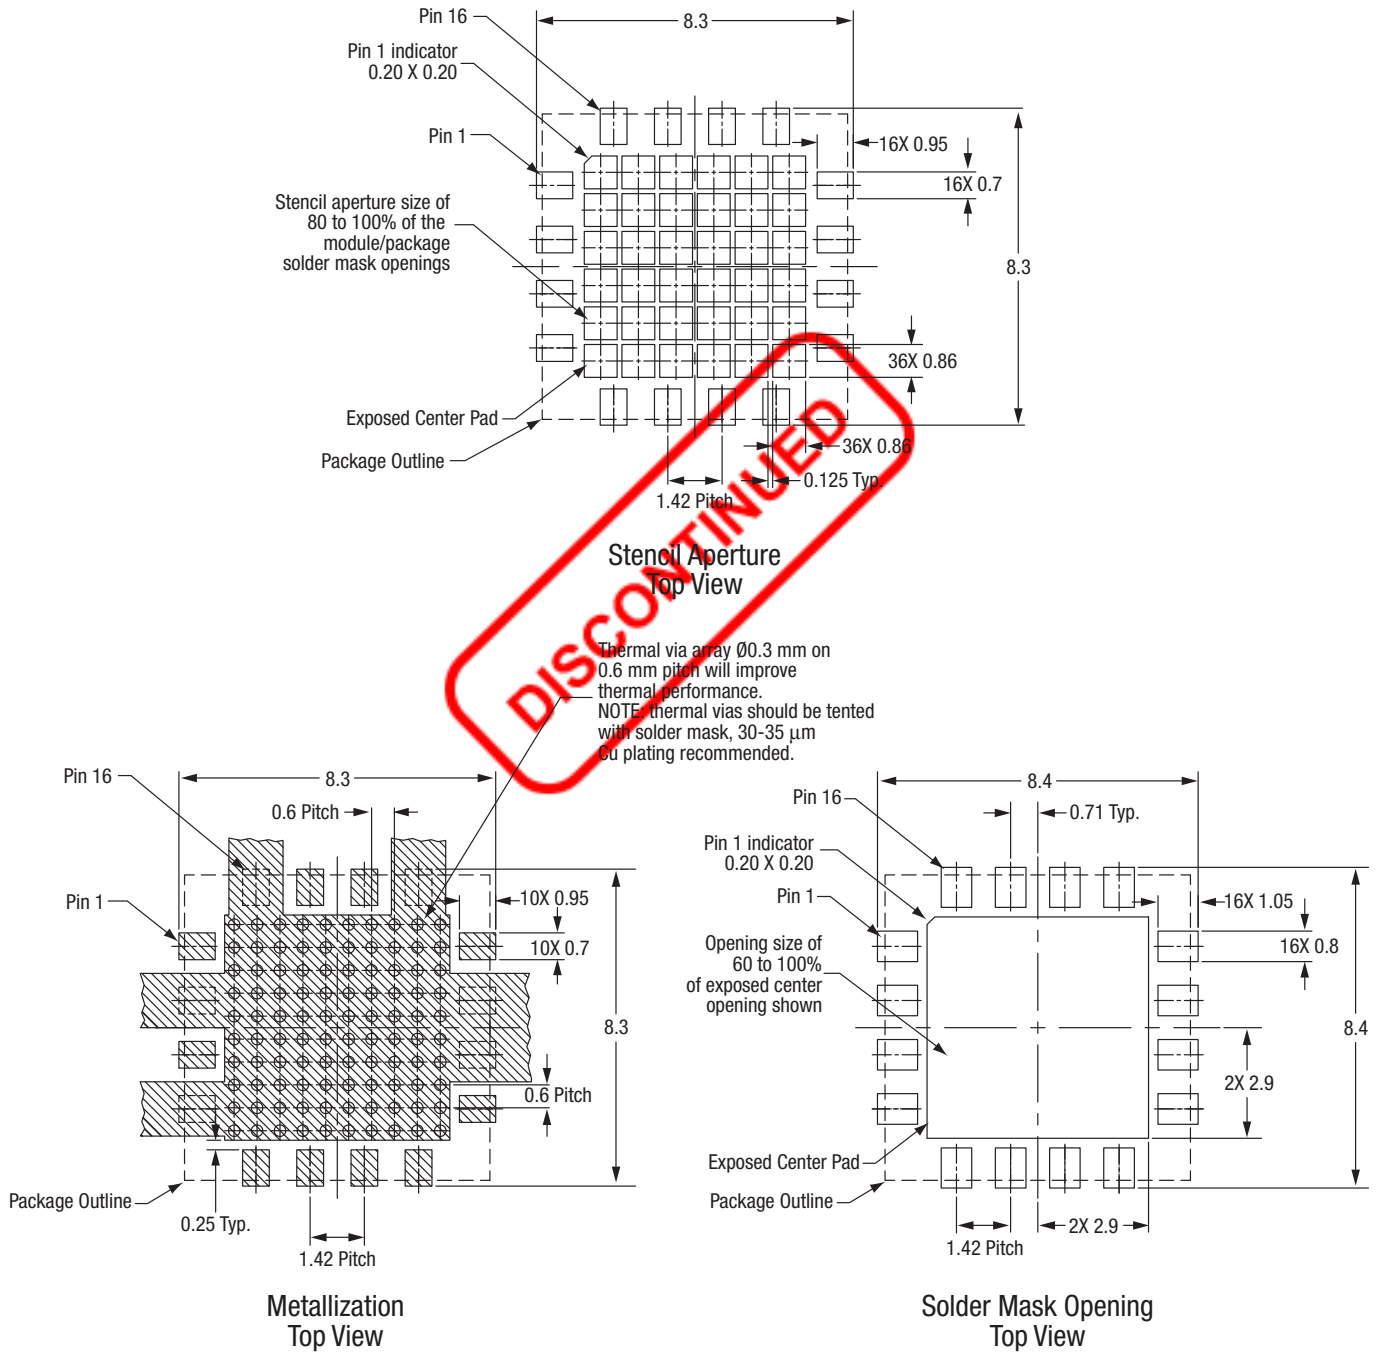

All dimensions are in millimeters

S2853

Figure 7. SKY65370-11 PCB Layout Footprint (Top View)

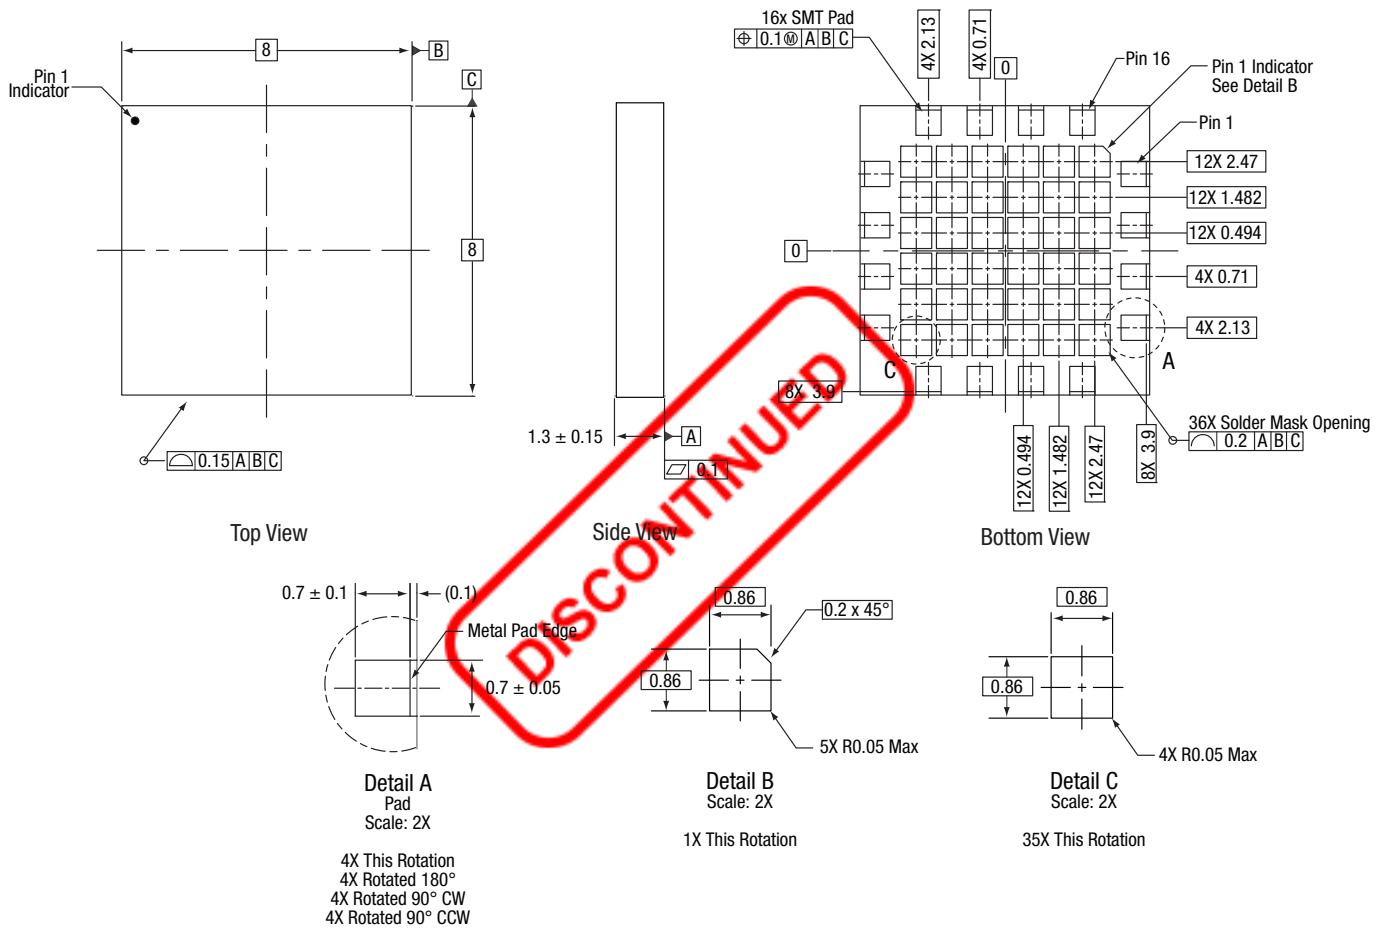


Notes:

1. Dimensions and tolerances according to ASME Y14.5M-1994.
2. All measurements are in millimeters.


S2473

Figure 8. SKY65370-11 Package Dimensions

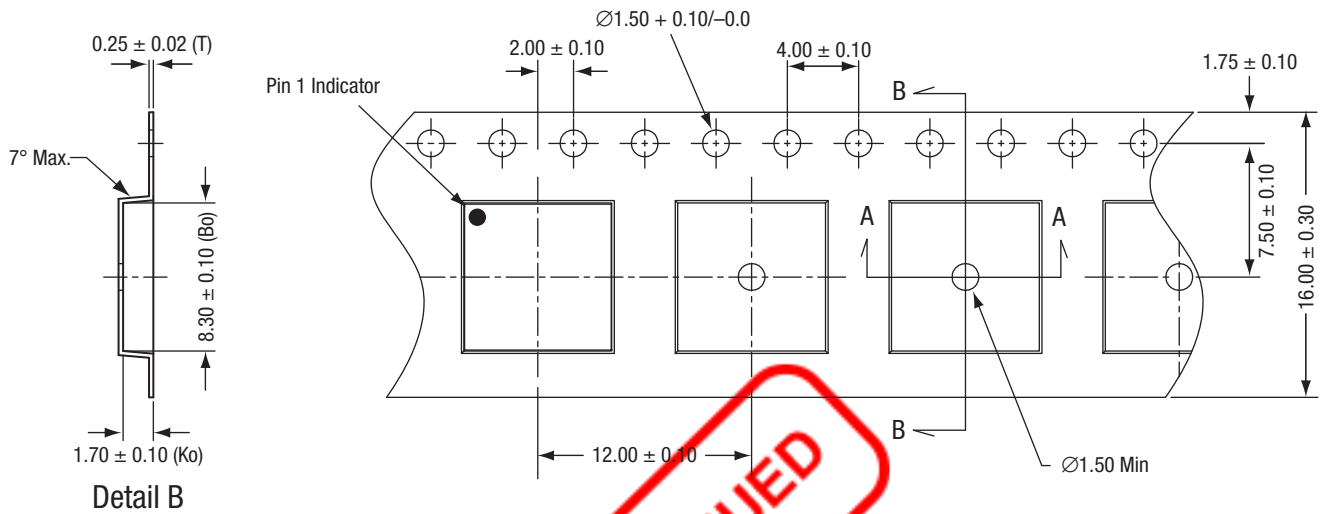

Notes:

1. Carrier tape: black conductive polycarbonate.
2. Cover tape material: transparent conductive PSA.
3. Cover tape size: 21.3 mm width.
4. All dimensions are in millimeters.
5. ESD-surface resistivity is $\leq 1 \times 10^{10}$ Ohms/square per EIA, JEDEC TNR Specification.
6. Po/P1 10 pitches cumulative tolerance on tape: ± 0.20 mm.
7. Ao & Bo measurement point to be 0.30 mm from bottom pocket.



DISCONTINUED

Figure 9. SKY65370-11 Tape and Reel Dimensions

S2798

Ordering Information

Model Name	Manufacturing Part Number	Evaluation Board Part Number
SKY65370-11: LNA	SKY65370-11	SKY65370-11-EVB



Copyright © 2012-2013, 2017, 2019 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. (“Skyworks”) products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.skyworksinc.com, are incorporated by reference.